


Surge Protected Extension Lead with USB

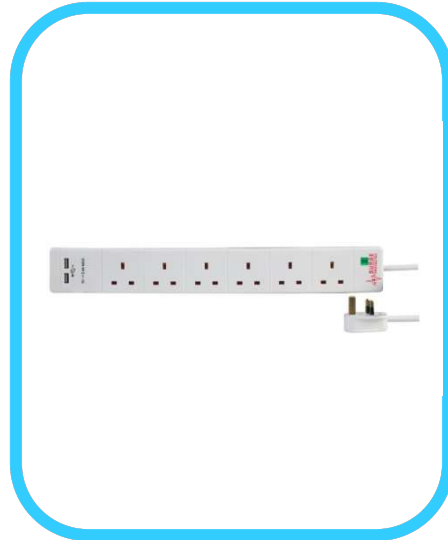

Specification

- Connector Type A: UK Mains Plug
- 2x USB charging ports
- LED Surge indicator
- Hanging holes on base of unit
- Rated at 13A, 250V AC
- USB ports rated at 2.4A, 5V
- BS1363/A and BS5733/A Compliant
- UK mains plug (type G), as used in the UK, IRL, Cyprus, Saudi Arabia, Malta and many others.

Approvals:



Complies to:



Dimensions and images may differ from those shown

Code Table:

Code	Description	No.of Outlets	Cable Length(m)	Colour
SH15377	4 Gang Extension Lead 1m White 2xUSB Surge Protected	4 Gang	1m	White
SH15378	4 Gang Extension Lead 2m White 2xUSB Surge Protected	4 Gang	2m	White
SH15379	4 Gang Extension Lead 3m White 2xUSB Surge Protected	4 Gang	3m	White
SH15380	4 Gang Extension Lead 5m White 2xUSB Surge Protected	4 Gang	5m	White
SH15381	4 Gang Extension Lead 1m Black 2xUSB Surge Protected	4 Gang	1m	Black
SH15382	4 Gang Extension Lead 2m Black 2xUSB Surge Protected	4 Gang	2m	Black
SH15383	4 Gang Extension Lead 3m Black 2xUSB Surge Protected	4 Gang	3m	Black
SH15384	4 Gang Extension Lead 5m Black 2xUSB Surge Protected	4 Gang	5m	Black
SH15393	6 Gang Extension Lead 1m White 2xUSB Surge Protected	6 Gang	1m	White
SH15394	6 Gang Extension Lead 2m White 2xUSB Surge Protected	6 Gang	2m	White
SH15395	6 Gang Extension Lead 3m White 2xUSB Surge Protected	6 Gang	3m	White
SH15396	6 Gang Extension Lead 5m White 2xUSB Surge Protected	6 Gang	5m	White
SH15397	6 Gang Extension Lead 1m Black 2xUSB Surge Protected	6 Gang	1m	Black
SH15398	6 Gang Extension Lead 2m Black 2xUSB Surge Protected	6 Gang	2m	Black
SH15399	6 Gang Extension Lead 3m Black 2xUSB Surge Protected	6 Gang	3m	Black
SH15400	6 Gang Extension Lead 5m Black 2xUSB Surge Protected	6 Gang	5m	Black

Dimensions and images may differ from those shown